




Engine Lubrication

Illustrated Index

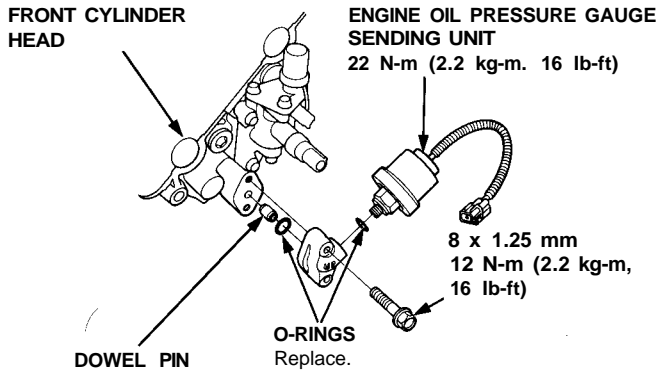

NOTE:

- Use new O-rings when reassembling.
- Apply oil to O-rings before installation.
- Use liquid gasket, Part No. 08718-0001.
- If the bottom of the oil pan is deformed, it should be repaired or the oil pan should be replaced to retain proper clearance between the screen and the bottom.

OIL CONTROL ORIFICE
Remove with 6 mm bolt and clean.

