
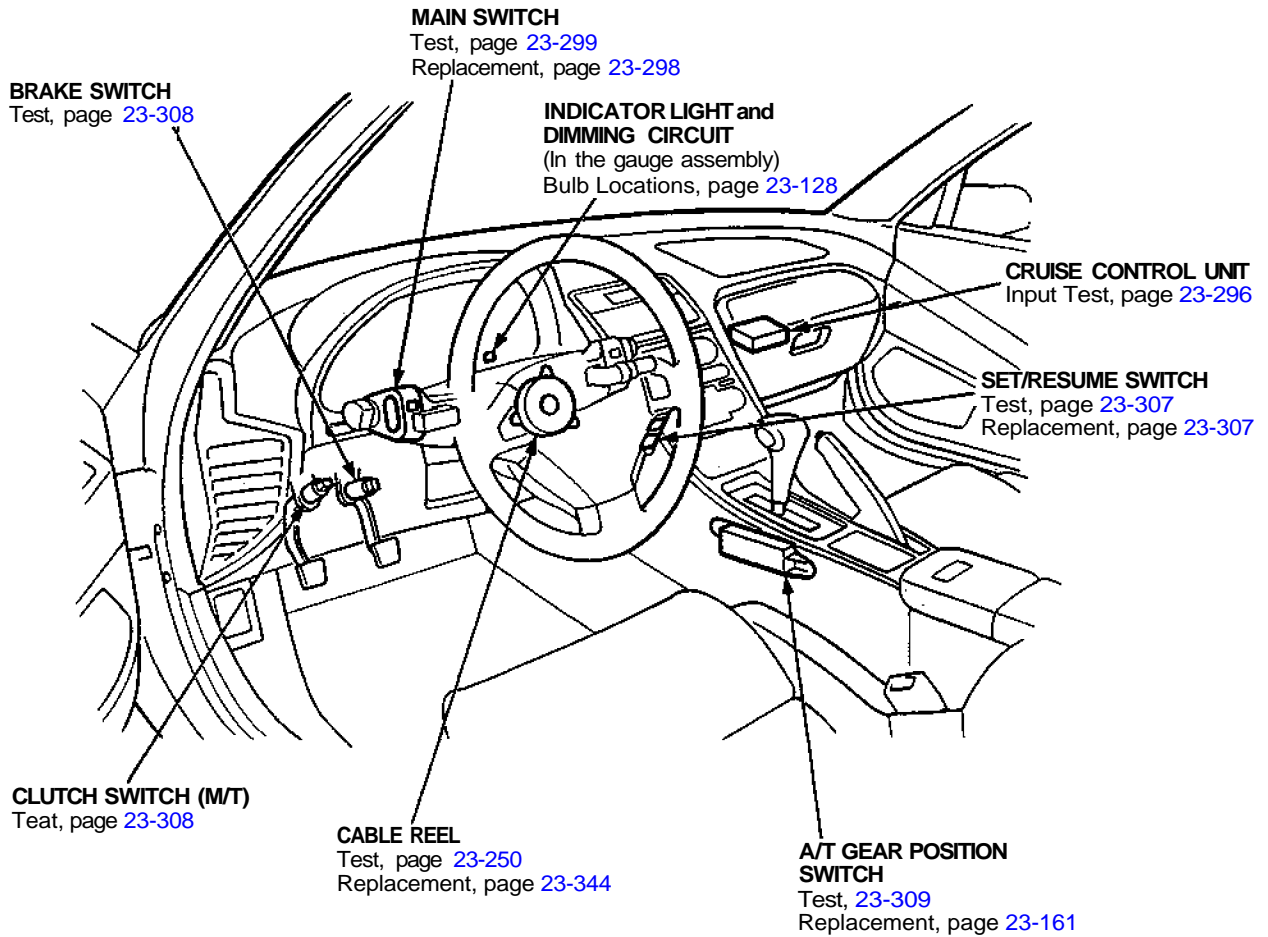


Cruise Control

Component Location Index


CAUTION:

- All SRS wiring harnesses are covered with yellow outer insulation.
- Before disconnecting any part of the SRS wire harness install the short connectors (see page [24-10](#)).
- Replace the entire affected SRS harness assembly if it has an open circuit or damaged wiring.

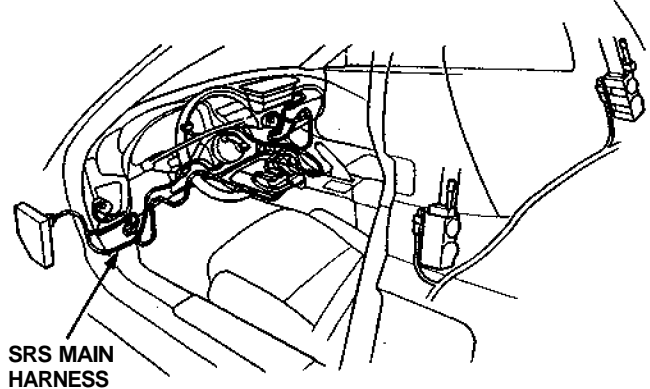



ACTUATOR ASSEMBLY
Test, page 23-302
Cable Adjustment,
page 23-303

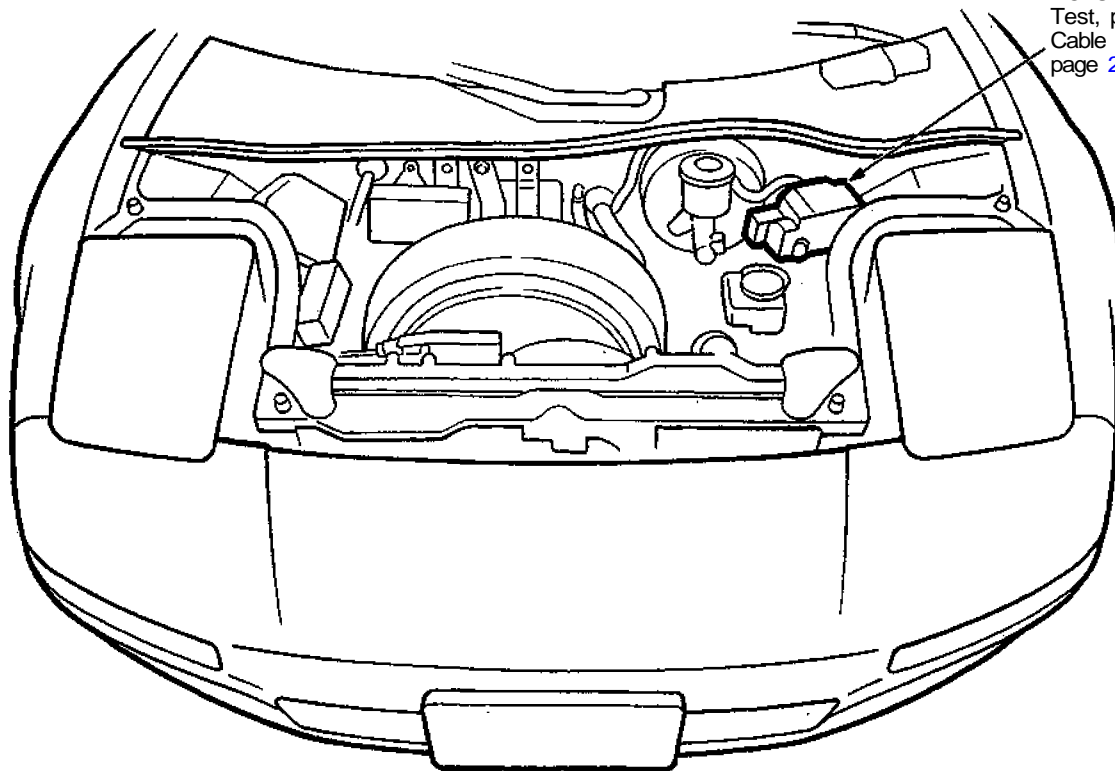

VEHICLE SPEED SENSOR (VSS)
Test, page 23-129

