




## Test Harness Installation


### Test Harness A

- Remove the glove box and disconnect the EPS control unit connector. Connect test harness A.

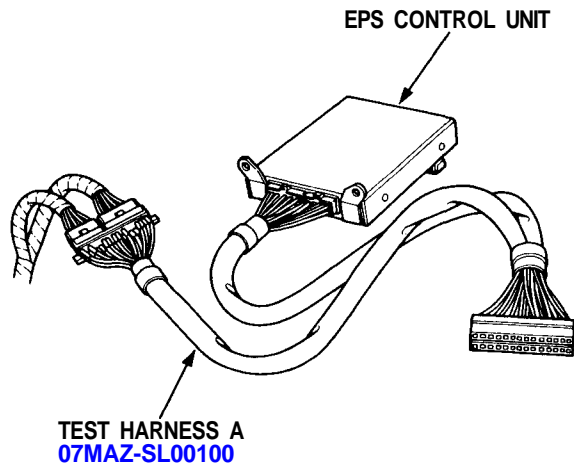


### Test Harness B

- Disconnect the torque sensor and steering speed sensor connectors and connect test harness B.

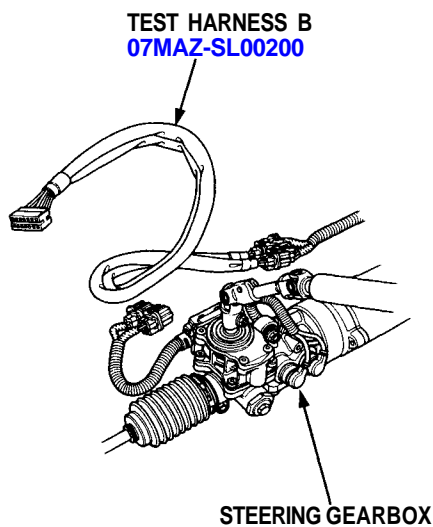

### Test Harness C

- Pull the floor carpet back from the passenger's side and remove the bass speaker and power unit cover. Disconnect the connector and connect test harness C.

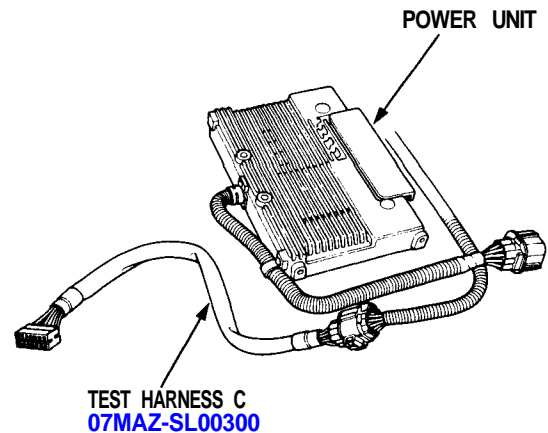

### Power Unit Checker

- Pull the floor carpet back from the passenger's side and remove the bass speaker and power unit cover. Disconnect the connector and connect the power unit checker.
- Remove the cigarette lighter and connect the power unit checker.

