


# Side Marker/Turn Signal/Hazard Flasher System

## Turn Signal/Hazard Relay Input Test

1. Remove the dashboard lower cover. Remove the turn signal/hazard relay from the left kick panel, then disconnect the 6-P connector.
2. Inspect the connector and socket terminals to be sure they are all making good contact.
  - If the terminals are bent, loose or corroded, repair them as necessary, and recheck the system.
  - If the terminals look OK, make the following input tests at the connector.
    - If any test indicates a problem, find and correct the cause, then recheck the system.
    - If all the input tests prove OK, the control unit must be faulty; replace it.

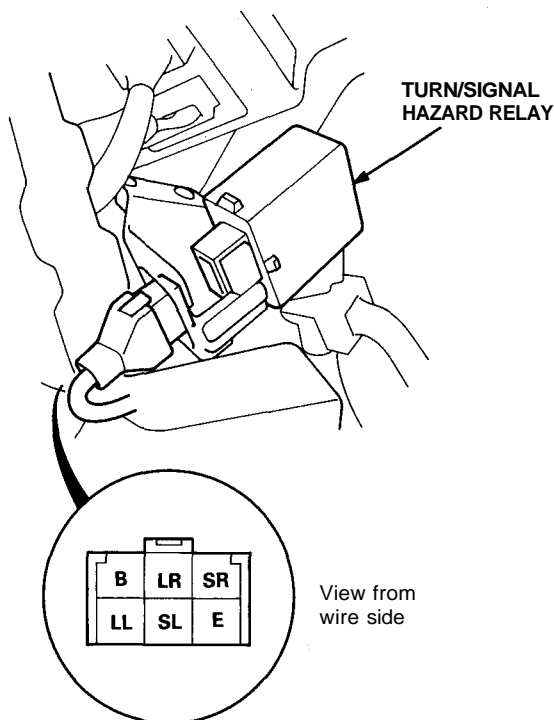

No.	Terminal	Test condition	Test: Desired result	Possible cause if result is not obtained
1	E (BLK)	Under all conditions	Check for continuity to ground: There should be continuity.	<ul style="list-style-type: none"> <li>• Poor ground (G401, G402, G403)</li> <li>• An open in the wire</li> </ul>
2	B (RED/WHT)	Under all conditions	Check for voltage to ground: There should be battery voltage.	<ul style="list-style-type: none"> <li>• Blown No. 46 (10 A) fuse</li> <li>• An open in the wire</li> </ul>
3	SR (BLU/YEL)	Ignition switch ON (II) and turn signal switch in right position	Check for voltage to ground: There should be battery voltage.	<ul style="list-style-type: none"> <li>• Blown No. 5 (15 A) fuse</li> <li>• Faulty turn signal switch or cancel unit</li> <li>• An open in the wire</li> </ul>
	SL (BLU/GRN)	Ignition switch ON and turn signal switch in left position		
4	SR (BLU/YEL)	Hazard warning switch ON	Check for voltage to ground: There should be battery voltage.	<ul style="list-style-type: none"> <li>• Faulty hazard warning switch</li> <li>• An open in the wire</li> </ul>
	SL (BLU/GRN)			
5	LR (GRN/YEL)	Connect the B terminal to the LR terminal.	The right turn signal lights should come on.	<ul style="list-style-type: none"> <li>• Blown bulb</li> <li>• Faulty side marker flasher circuit</li> <li>• Poor ground (G301, G401, G402, G403, G551)</li> <li>• An open in the wire</li> </ul>
6	LL (GRN/BLU)	Connect the B terminal to the LL terminal.	The left turn signal lights should come on.	<ul style="list-style-type: none"> <li>• Blown bulb</li> <li>• Faulty side marker flasher circuit</li> <li>• Poor ground (G301, G401, G402, G403, G551)</li> <li>• An open in the wire</li> </ul>